



PRESSURE VACUUM VENT

Mod. 197B3



APPLICATION

The **PRESSURE VACUUM VENT RIDART** is a safety device for tank-truck. its functions are pressure and depressure the tank, it has BSPP 1" male thread in two different settings pressure.
Inlet poppet closes automatically in case of tank overturning.


CHEMICAL SUITABILITY

- Standard model is for traditional fuel without additives and compatible chemical products.



CE Ex II 2 G

CODE	094465	094466
BODY	ALLUMINIUM	ALLUMINIUM
POPPET	BRASS/INOX	BRASS/INOX
GASKET	NBR	NBR
A	72	72
B	66	66
C	13	13
DN1	1" BSPP M	1" BSPP M
PRESSURE	+0,65 bar -10 mbar	+0,65 bar -10 mbar
O-RING VITON® SPARE PART	OR3143	OR3143
WORKING TEMPERATURE	-20°C + 60°C	-20°C + 60°C

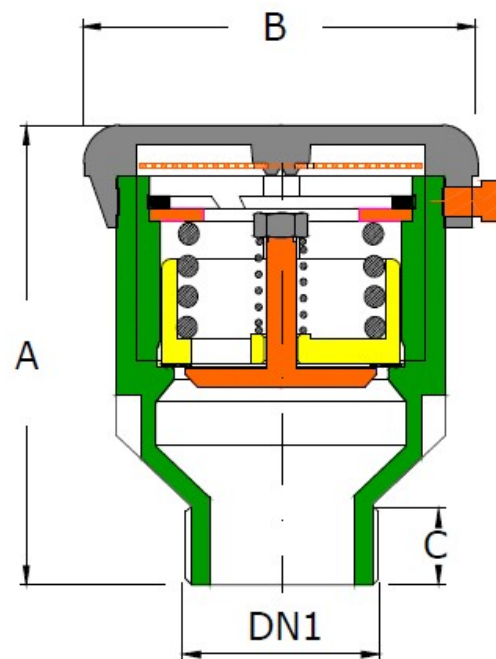

INSTALLATION

- Double Effect valve is only for vertical installation .
- For correct installation follow the Directives and product User Manual.
- Contact our technical department for custom application or maintenance by email to: quality@ridart.it
- Product Certification, Declaration of Conformity and User Manuals are available on: www.ridart.it/support.

MAINTENANCE

- Periodically check the valve is necessary to remove possible dirty, nests or insects.
- Always replace the product after fire or deflagration.
- In case of tampering warranty expires and safety protection is not guaranteed.

RIDART s.r.l. via Adua, 17 - 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122
www.ridart.it info@ridart.it +39 0332 463301

Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support

The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances ±20%.