



ANGLE CHECK VALVE STAINLESS STEEL

Mod. 60 SS



APPLICATION

It's a device in according with Directive 2014/34/EU and harmonized standard.
This angle check valve is designed to prevent the drainage of fuel (loss of prime) in the suction line and permits the product flowing only towards a dispenser.
The valve is installed on the manhole lid of the storage tank.




CE Ex II 2 G

CHEMICAL SUITABILITY

PARTS	60 SS MODEL
BODY	STAINLESS STEEL
O-RING/SEAL	VITON®/TEFLON®
POPPET	STAINLESS STEEL
CAP MATERIAL	STAINLESS STEEL
MAX WORKING TEMPERATURE	- 20°C + 60°C
MAX WORKING PRESSURE	16 PN

DIMENSIONS

CODE	DN1	DN2	A	B	C
089920	2" BSPP F	2" BSPP F	122 mm	68 mm	66 mm

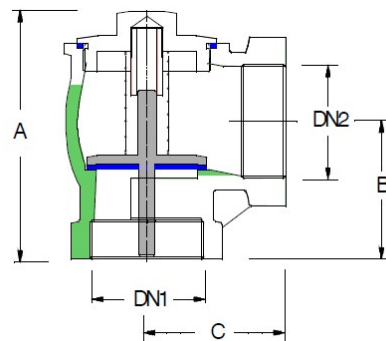


INSTALLATION

- The valve is installed at the highest point of the tank, normally on the manhole cover.
- For correct installation follow the Directives and product User Manual.
- For custom application or maintenance write to: quality@ridart.it.
- Declaration of Conformity and User Manual are available on: www.ridart.it/support



MAINTENANCE

- Periodically check the device is necessary to remove possible dirty.
- Always replace the product after fire, deflagration, brake or damage.
- In case of tampering warranty expires and safety protection is not guaranteed.

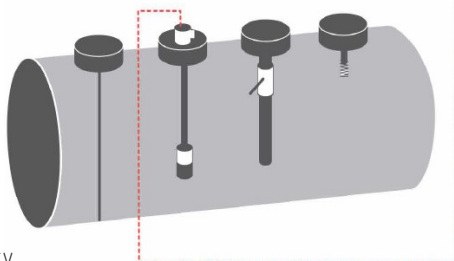

RIDART s.r.l. via Adua, 17 - 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122
www.ridart.it info@ridart.it +39 0332 463301

Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support

The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances ±20%.