




GASOLINE MANHOLE

| COD. | DESCRIPTION |
|-----------|-------------------------------------|
| 181 EN-P | IN-LINE DEFLAGRATION FLAME ARRESTER |
| 120B | VAPOUR RECOVERY |
| 197 EN-P | PRESSURE VACUUM/VENT |
| 152-80 | SATURATOR |
| 165 | AIR SATURATION VESSEL |
| 1010 EN-P | BALL FLOAT VENT VALVE |
| 93 | VAPOR STOP DEVICE |
| 442B-80AL | OVERFILL PREVENTION VALVE |
| 135 | DIP STICKS HOUSING |
| 950 | DIP STICKS |

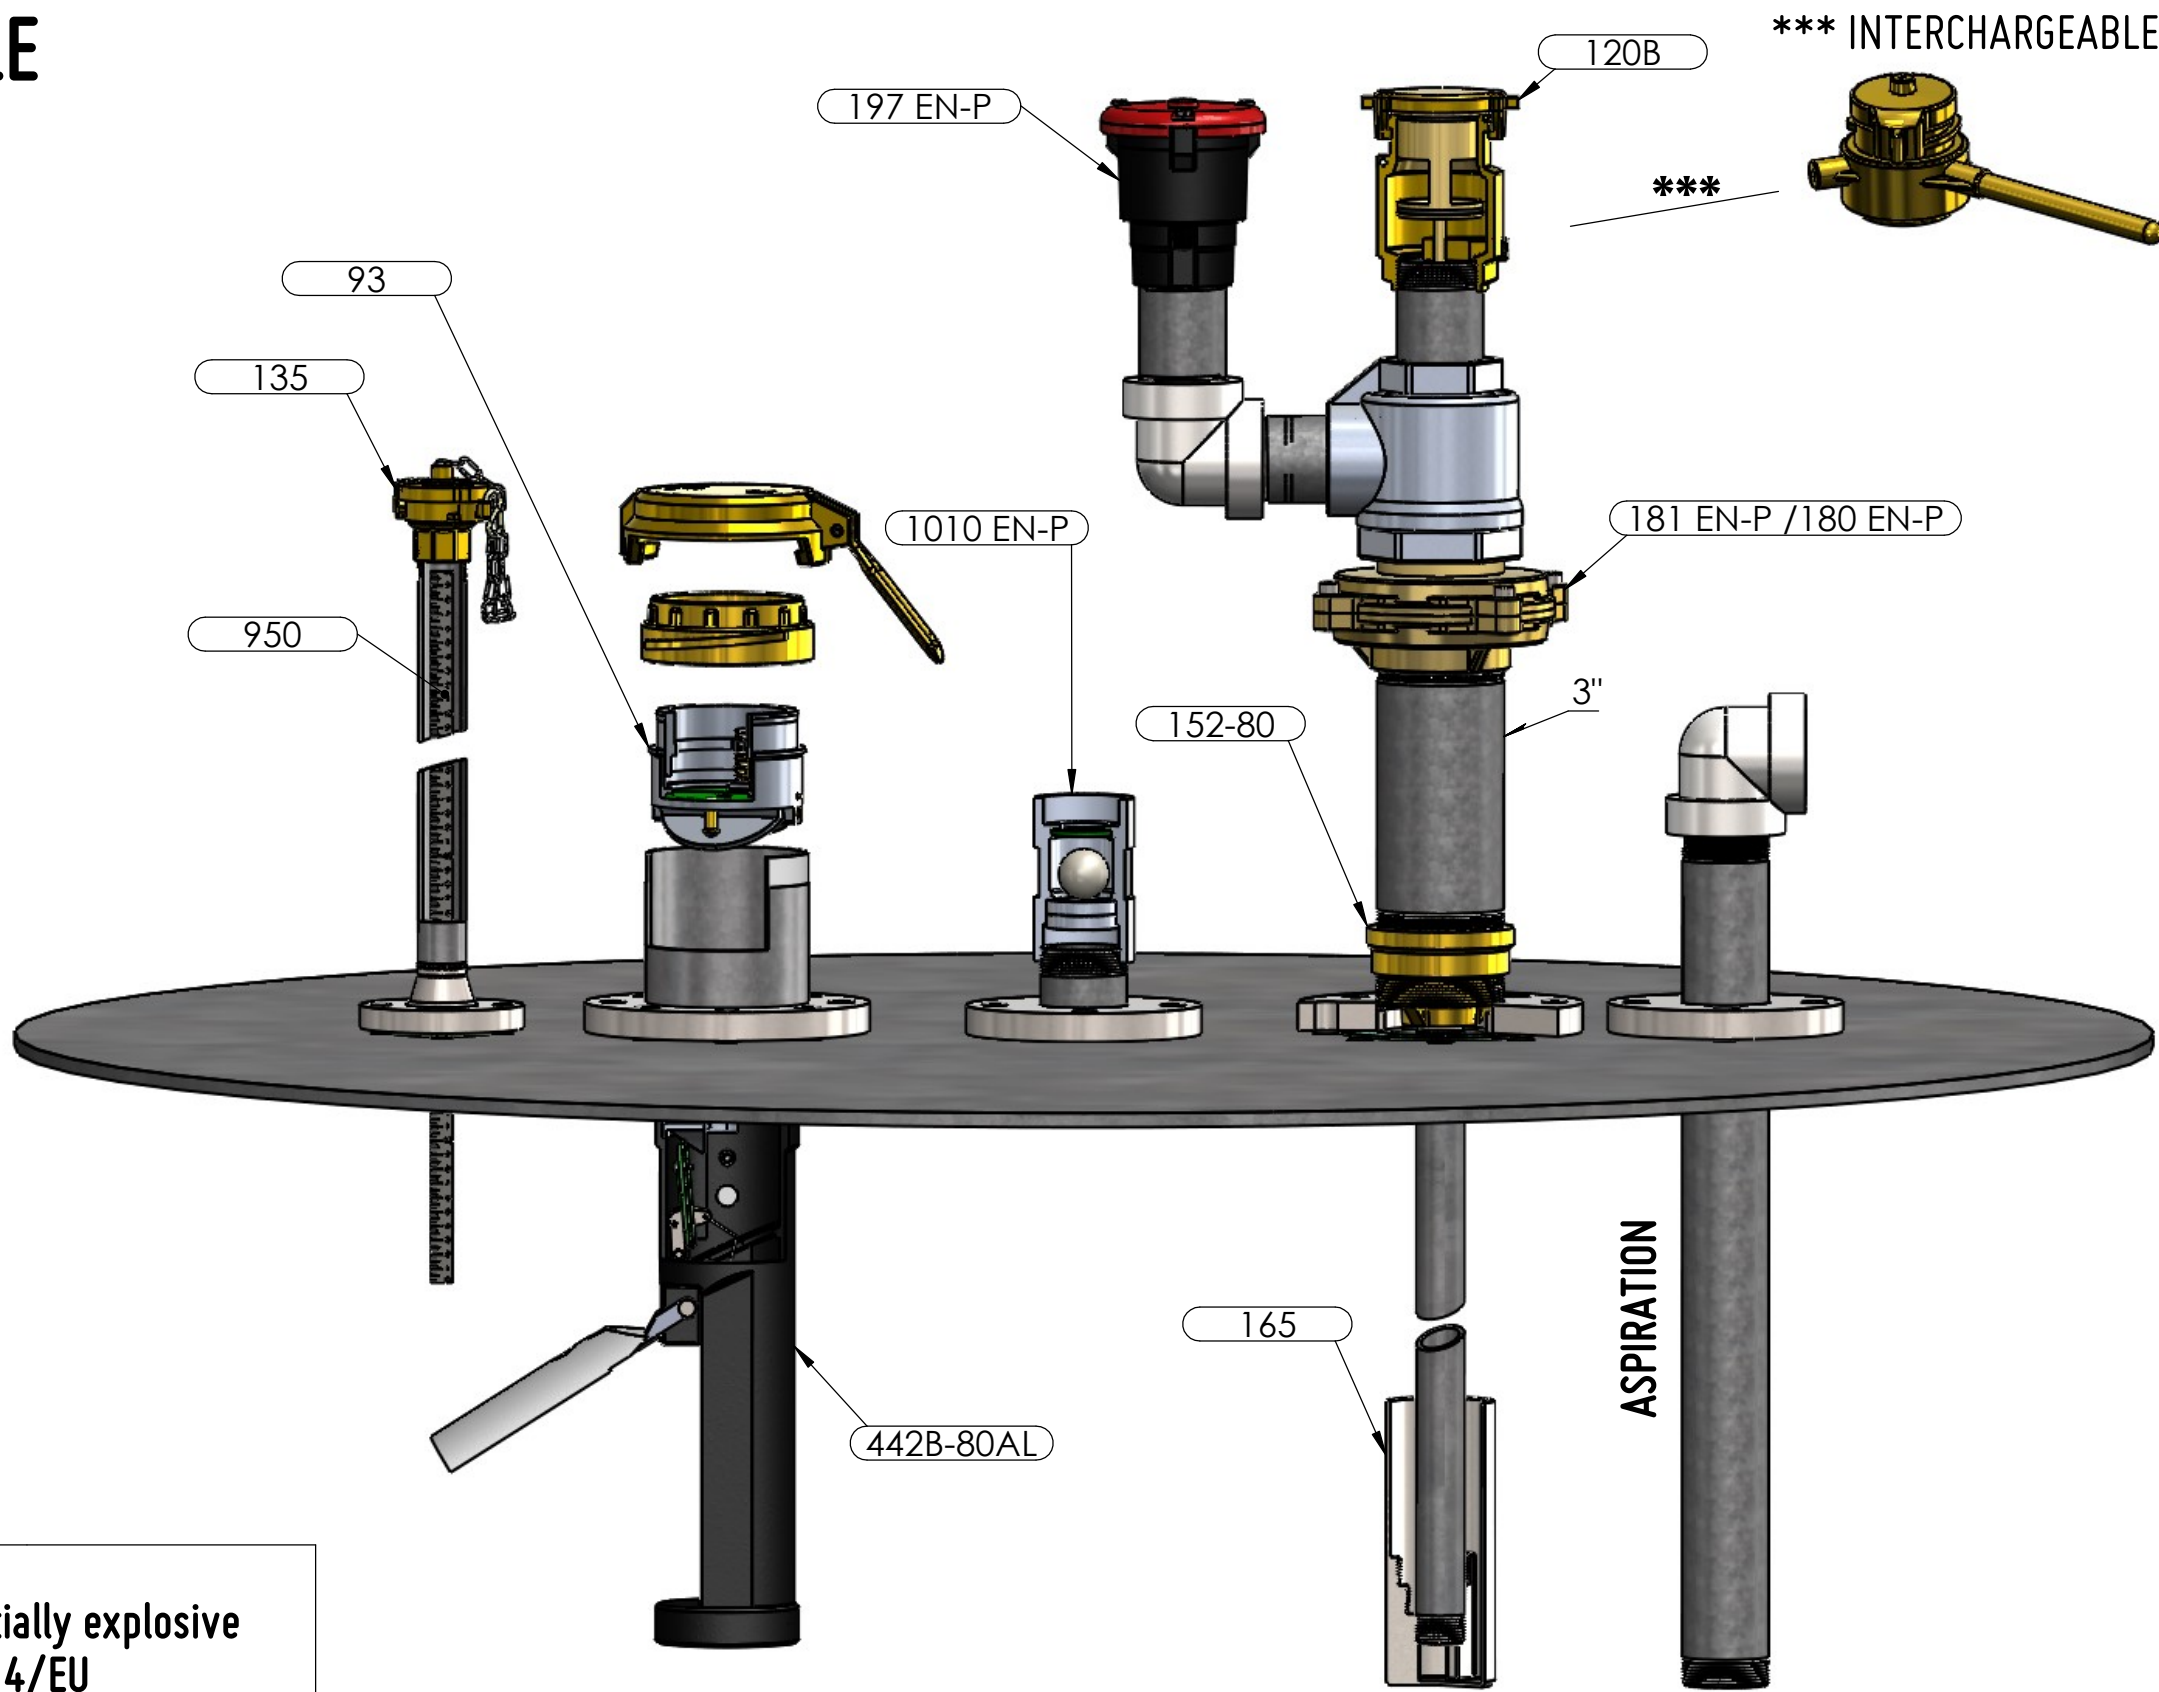

Protection System intended for use in potentially explosive atmospheres Directive ATEX 2014/34/EU

| TYPE | NORMS | PRODUCTS | MARKING |
|--|---|----------------------|---------------------------------|
| OVERFILL VALVES | UNI EN 13616-1:2016 UNI EN 13616-2:2016 | 442B-80AL / 442-80AL | Ex II 1G2B |
| IN-LINE DEFLAGRATION FLAME ARRESTORS | HARMONIZED STANDARD EN ISO 16852:2016 | 181 EN-P / 1010 ENP | Ex G IIB3 |
| END OF-LINE DEFLAGRATION FLAME ARRESTORS | HARMONIZED STANDARD EN ISO 16852:2016 | 197 EN-P | Ex G IIB3 / Ex G IIC (HYDROGEN) |